


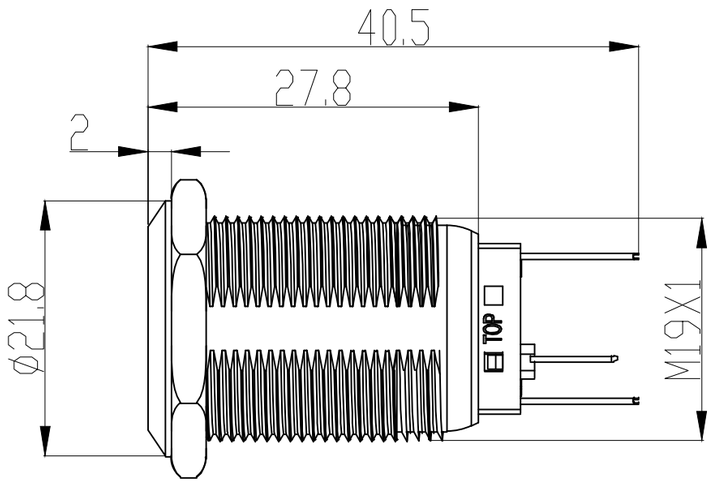


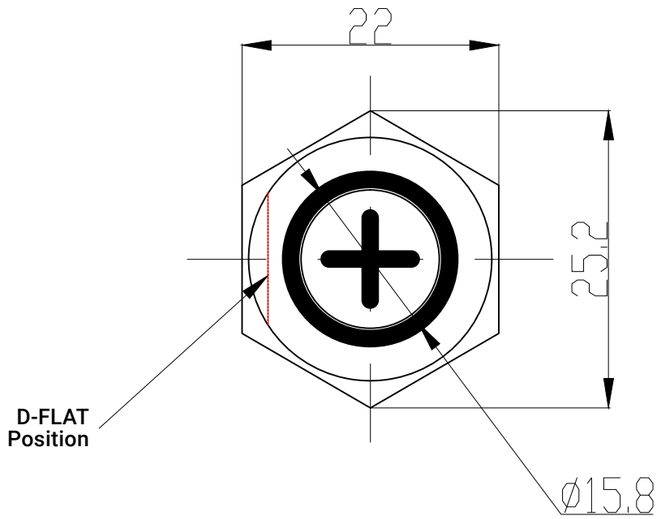


MAX VOLTAGE **MAX CURRENT/VOLTAGE** (RES. LOAD)	250 VAC 3A/220VAC - 5A/24VDC
INITIAL CONTACT RESISTANCE **INSULATION RESISTANCE** **DIELECTRIC STRENGH** **ELECTRICAL LIFE**	50mΩ max. 1000 mΩ mini. At 500VDC 1500 VAC, 50Hz, 50 seconds 100 000 cycles at full load
LED VOLTAGE **LED TYPICAL LIFE**	24V 40 000 HOURS
ACTUATION FORCE **TRAVEL** **MECHANICAL LIFE**	2~5 N 1.5~2.5 MM 1 000 000 CYCLES MINI.
CONTACT TYPE **ACTION TYPE**	NONC - C FORM MOMENTARY
OPERATING TEMPERATURE **INGRESS PROTECTION** **COMPLIANCE**	-25°C~+55°C IP67 FRONTPANEL IEC60947-5-1, GB14048.5, ROHS, REACH
SWITCHBASE MATERIAL **BODY MATERIAL** **BUTTON MATERIAL** **SOLDER LUGS MATERIAL** **CONTACT MATERIAL**	PA66 STAINLESS STEEL 316 STAINLESS STEEL 304 GOLD PLATED COPPER SILVER TIN OXIDE

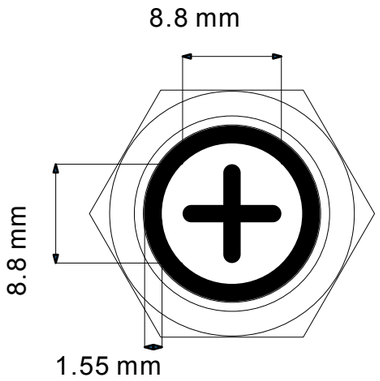

ILLUMINATED LOGO DIMENSIONS



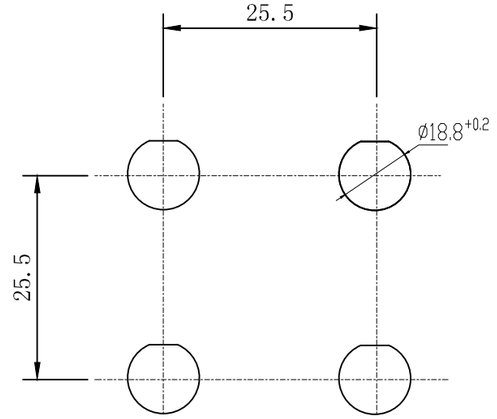

TYPICAL INSTALLATION SIZE

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 TO + ...	±0.40mm

Notes :

all dimensions are given in mm and inches
modifications are possible without prior notice

dia19 stainless 1NO1NC Blue illuminated logo '+' 24V High Brightness, D-FLAT

Revision: **B**

29/01/2024

Part number : **SOAV3CSB24-X01**

Folio : 1/1

Scale :

Family : XXX

Format: A3