


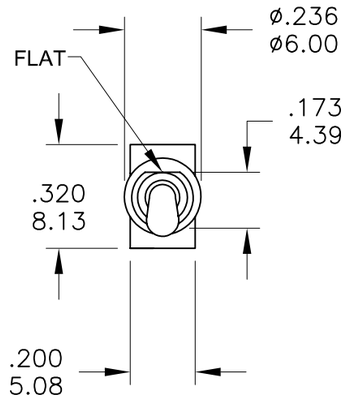
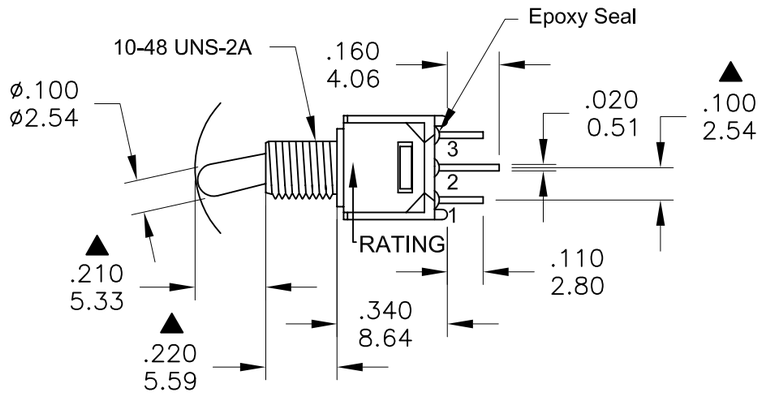








Model No.	POS.1	POS.2	POS.3
			
2MS1	ON	NONE	ON
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION





Without locking ring.

PANEL MOUNTING

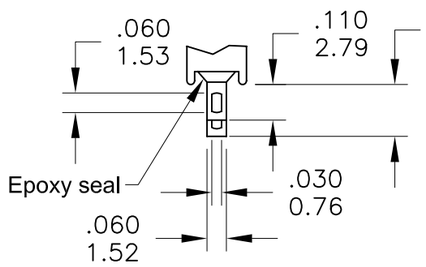

SOLDER LUG

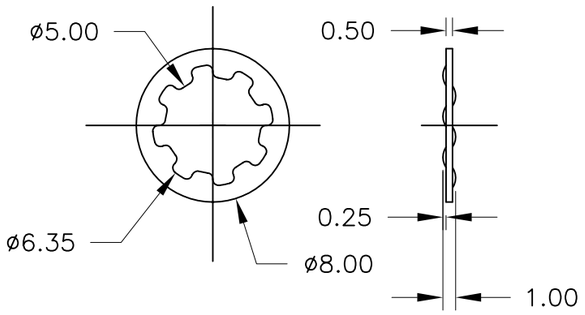

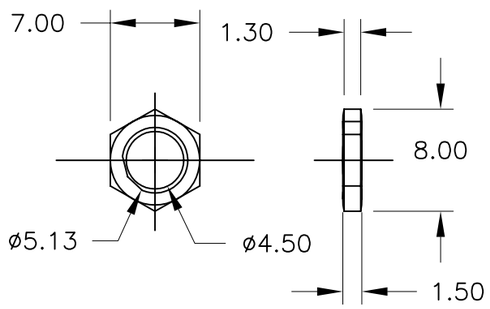

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)

Q : 1Amp @250VAC

3Amps @120 VAC or 28 VDC

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE - Dially phthalate(DAP)(UL94V-0)
ACTUATOR - Brass,chrome plated
BUSHING - Brass,nickel plated
HOUSING - Stainless Steel
SWITCH SUPPORT - Brass,tin plated.
TERMINALS/CONTACT - Brass, with Silver or gold plated.
RoHS - 2002/95/EC

RoHS ✓

Reach friendly

tacthill SWITCHES	lever switch 2 positions, ON-ON, 1A@250VAC	Revision: A
08/08/2014	part number : **2MS1T2B1M1QES-5**	Folio : 1/1
	file :	Scale : 2:1
	tolerances : 0.00 mm ± 0.25 mm 0.0 mm ± 0.40 mm Angular : ± 5°	Folio : XXX
	All dimensions in mm and/or inches Modifications possible without prior notice. This is not a contractual document	Format: A3