




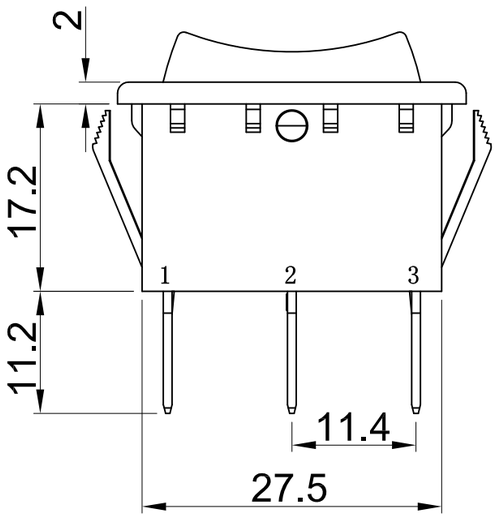

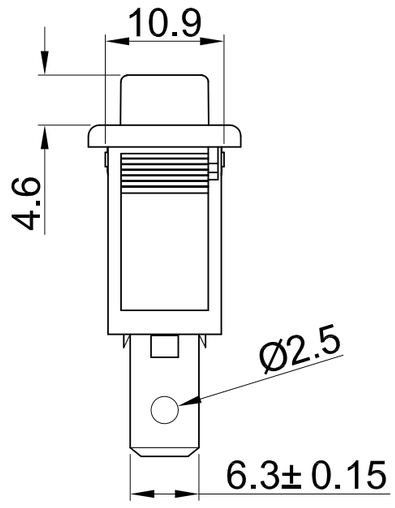


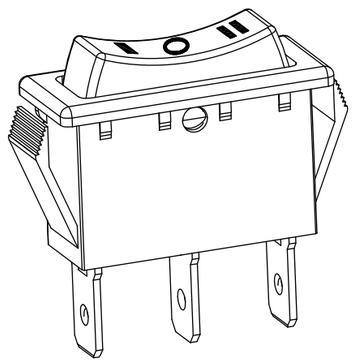

Rating: 20A 125V AC (UL CUL)
22A 250V AC (ENEC CB CQC)
Contact Resistance: 50m¦ ¸ Max
Insulation Resistance: DC 500V 100M¦ ¸ Min.
Dielectric Strength: AC1500V 1 minute
Operating Force: 650± 150gf
Mechanical Life: Over 50,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20℃~+85℃
Safety Approval:

MATERIAL:
Body:PA,UL rated:94 V-2 min.
Actuator:PA,UL rated:94 V-2 min.
Terminal:Brass,silver or tin plated


CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	11.0+0.1
1.25~2.00	30.2+0.1	11.0+0.1
2.00~3.00	30.4+0.1	11.0+0.1

RoHS

SWITCHING CIRCUIT



DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 TO + ...	±0.40mm

GTACTHILL SWITCHES & HMI

02/04/2022

Notes :

Rocker switch, single pole ON-OFF-ON, black body, black button, faston terminals

Part number : **R-1-130-C6N-BB**

all dimensions are given in mm and inches
modifications are possible without prior notice

Revision: **A**

Folio : 1/1

Scale :

Family : XXX

Format: A3